

MT Series


MT



Motto trailer boom lifts




## MT7

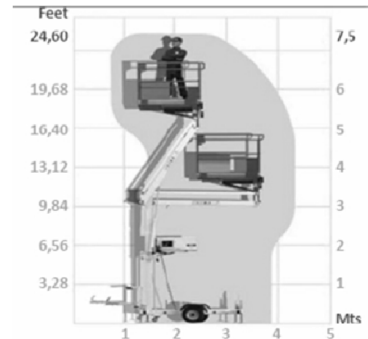


- Working height up to 7,5 m - Maximum horizontal outreach 4,30 m
- Standard configuration : Manual stabilizers– Single phase motor
- Certified for two persons.
- Load capacity = 200 kg
- Weight 470 kg
- Transport length 1,97 m

## MT9

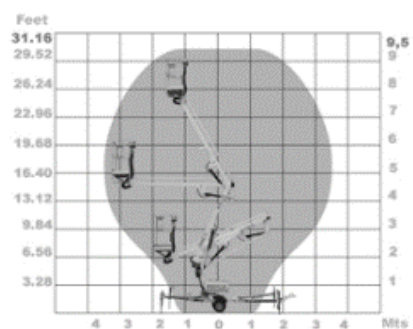


- Working height up to 9,5 m - Maximum horizontal outreach 3,50 m
- Standard configuration : Manual stabilizers– Single phase motor
- Certified for one person
- Load capacity = 120 kg
- Weight 736 kg
- Transport length 4,13 m

## MT12

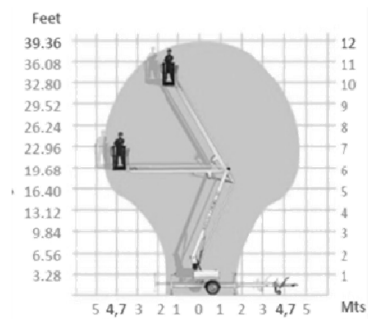


- Working height up to 12 m - Maximum horizontal outreach 4,70 m
- Standard configurations : Manual and hydraulic stabilizers – Single phase motor
- Certified for two persons
- Load capacity = 200 kg
- Weight 1.150 kg
- Transport length 5,98 m

## MT12T

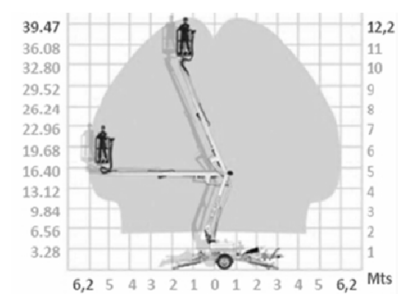


- Working height up to 12,2 m - Maximum horizontal outreach 6,20 m
- Articulated and telescopic platform
- Standard configuration : Hydraulic stabilizers– Single phase motor
- Certified for two persons
- Load capacity = 200 kg
- Weight 1.410 kg
- Transport length 4,56 m

## MT15

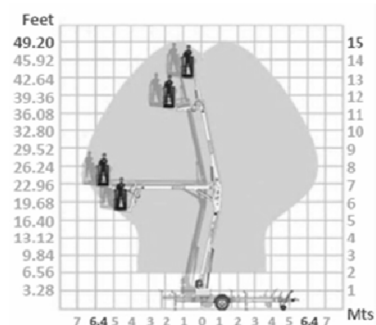


- Working height up to 15 m - Maximum horizontal outreach 6,40 m
- Standard configurations : Manual, hydraulic, articulated and telescopic stabilizers – Single phase motor
- Certified for two persons
- Load capacity = 200 kg
- Weight 1.550 kg
- Transport length 7,1 m

## MT15T

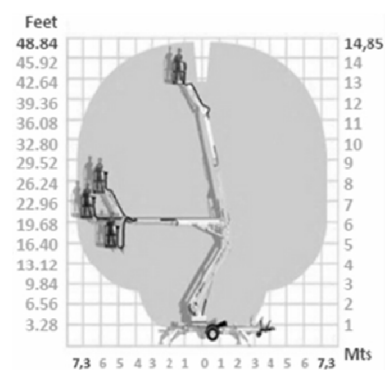

- Working height up to 14,85 m - Maximum horizontal outreach 7,30 m
- Articulated and telescopic platform
- Standard configurations : Hydraulic stabilizers– Single phase motor
- Certified for two persons
- Load capacity = 200 kg
- Weight 1.900 kg
- Transport length 6,25 m

# MT17

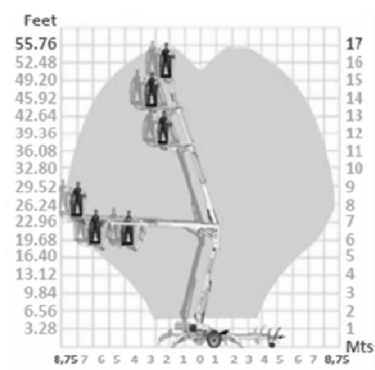

- Working height up to 17 m - Maximum horizontal outreach 8,75 m
- Standard configurations : Hydraulic and articulated and telescopic stabilizers– Single phase motor
- Certified for two persons
- Load capacity = 200 kg
- Weight 2300 kg
- Transport length 7,27 m




## MAIN CHARACTERISTICS

|        | Working height<br>(m) | Horizontal range<br>(m) | Transport length<br>(m) | Basket size<br>(m) | Weight<br>(Kg) |
|--------|-----------------------|-------------------------|-------------------------|--------------------|----------------|
| MT 7   | 7,5                   | 4,30                    | 1,97                    | 1,2 x 0,6          | 470            |
| MT 9   | 9,5                   | 3,50                    | 4,13                    | 0,6 X 0,6          | 736            |
| MT 12  | 12                    | 4,70                    | 5,98                    | 0,9 x 0,6          | 1150           |
| MT 12T | 12,2                  | 6,2                     | 4,56                    | 1,1 x 0,6          | 1410           |
| MT 15  | 15                    | 6,4                     | 7,1                     | 0,95 x 0,65        | 1550           |
| MT 15T | 14,85                 | 7,3                     | 6,25                    | 1,1 x 0,6          | 1900           |
| MT 17  | 17                    | 8,75                    | 7,27                    | 1,2 x 0.7          | 2300           |

## MAIN OPTIONAL DEVICES

|                                         | MT7 | MT9 | MT12 | MT12T | MT15 | MT15T | MT17 |
|-----------------------------------------|-----|-----|------|-------|------|-------|------|
| Electrical outlet in basket             | ✓   | ✓   | ✓    | ✓     | ✓    | ✓     | ✓    |
| Lighting kit for road transport         | ✓   | ✓   | ✓    | ✓     | ✓    | ✓     | ✓    |
| Batteries supply / Charge indicator     | ✓   | ✓   | ✓    | ✓     | ✓    | ✓     | ✓    |
| Generator supply                        |     |     | ✓    | ✓     | ✓    | ✓     | ✓    |
| Emergency descent from the basket       |     |     | ✓    | ✓     | ✓    | ✓     | ✓    |
| Descent buzzer                          |     |     | ✓    | ✓     | ✓    | ✓     | ✓    |
| Load limit device in basket             |     |     |      | ✓     | ✓    | ✓     | ✓    |
| Hour meter                              |     |     | ✓    | ✓     | ✓    | ✓     | ✓    |
| Hydraulic stabilizer                    |     |     | ✓    |       | ✓    |       | ✓    |
| Articulated hydraulic stabilizer        |     |     |      |       | ✓    |       | ✓    |
| Trailer coupling ring type              | ✓   | ✓   | ✓    | ✓     | ✓    | ✓     | ✓    |
| Self driving system on wheels           |     |     | ✓    | ✓     | ✓    | ✓     | ✓    |
| Steel basket 1,2 x 0,6 m                |     |     | ✓    |       |      |       |      |
| Steel basket 1,4 x 0,7 m                |     |     |      |       | ✓    |       |      |
| Aluminium basket with load limit device |     |     |      |       | ✓    |       | ✓    |
| Insulating basket                       |     |     | ✓    | ✓     | ✓    | ✓     | ✓    |
| Manual rotation of the basket 150°      |     |     |      |       | ✓    | ✓     | ✓    |
| Hydraulic rotation of the basket 150 °  |     |     |      | ✓     |      |       |      |
| Spare wheels                            | ✓   | ✓   | ✓    | ✓     | ✓    | ✓     | ✓    |
| Rotating light                          | ✓   | ✓   | ✓    | ✓     | ✓    | ✓     | ✓    |
| Inertial brake                          |     | ✓   |      |       |      |       |      |

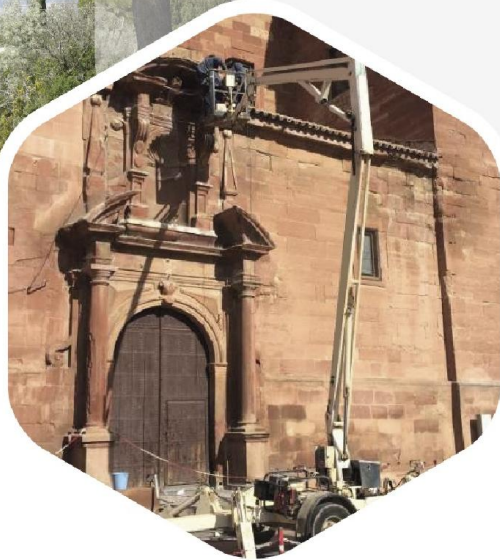

**MOTTO**  
ELEVATION

**Motto Elevation S.L.**

T. +34 943 100 123

**S** motto.elevation

Pol. Bulandegi, 6

20150 Aduna (Gipuzkoa) Spain

**[www.mottoelevation.com](http://www.mottoelevation.com)**

**[motto@mottoelevation.com](mailto:motto@mottoelevation.com)**