


MTR




CE

	Working height (m)	Max Extension (m)	Gradeability %	Weight (kg)
MTR 130	12,2	6,5	30	1600
MTR 150	15,2	8,5	30	2100
MTR 160	15,6	7,5	30	1950
MTR 180	17,6	8,5	30	2200
MTR 190	18,2	11	30	2800
MTR 210	21,15	11	30	3000
MTR 260	26	13	40	4800
MTR 300	30	14,5	40	6000


MTR130

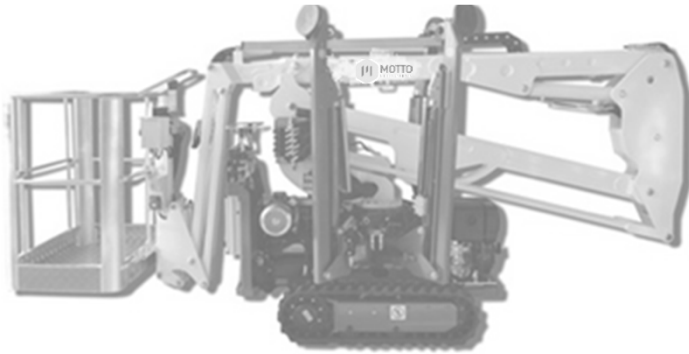

- Working height up to 12,20 m - Maximum horizontal outreach 6,50 m
- Petrol Motor Honda 9,6 KW

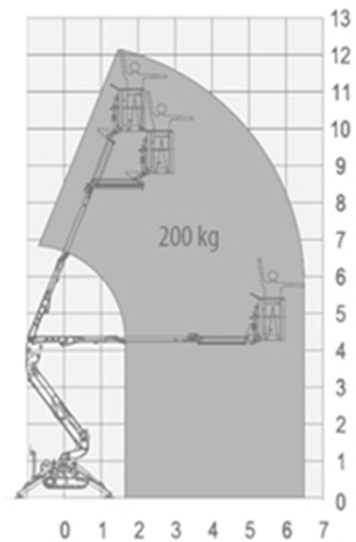


MTR150

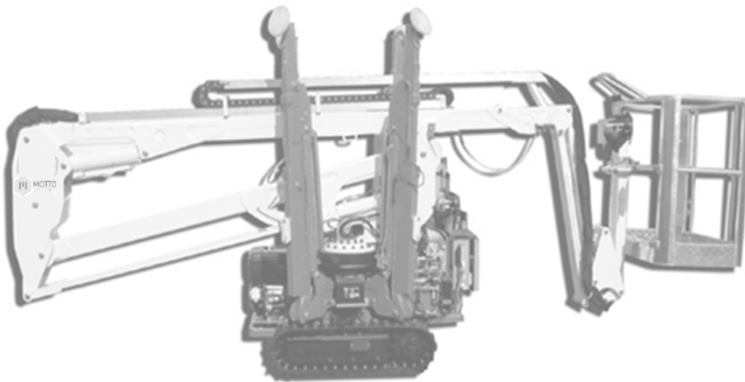


- Working height up to 15,20 m - Maximum horizontal outreach 8,50 m
- Petrol Motor Honda 9,6 KW




MTR160

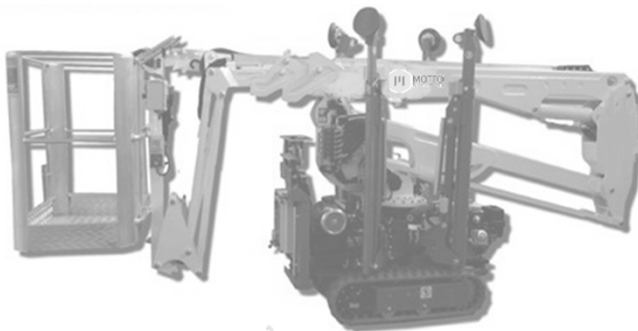


- Working height up to 15,60 m - Maximum horizontal outreach 7,50 m
- Petrol Motor Honda 9,6 KW

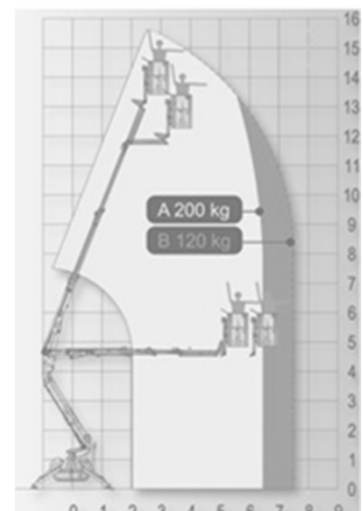

MTR180

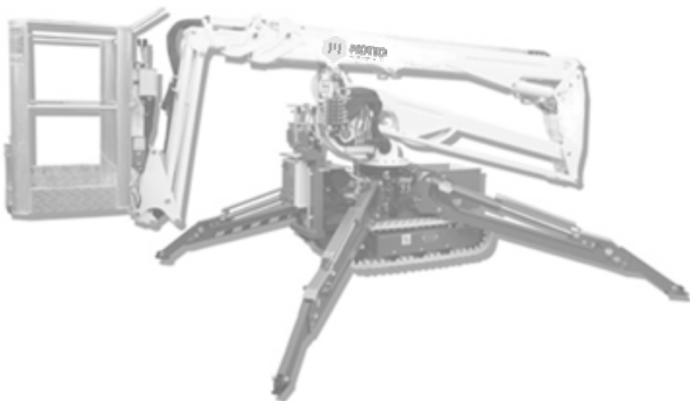


- Working height up to 17,60 m - Maximum horizontal outreach 8,50 m
- Petrol Motor Honda 9,6 KW

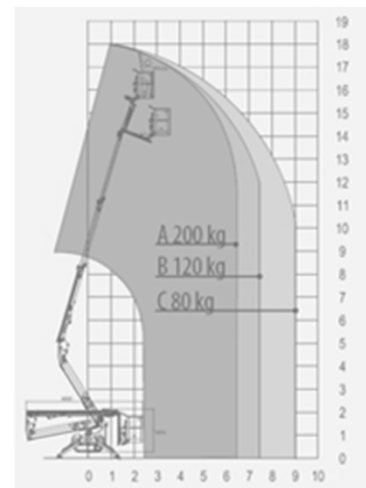

MTR190




- Working height up to 18,50 m - Maximum horizontal outreach 11,00 m
- Petrol Motor Honda 9,6 KW

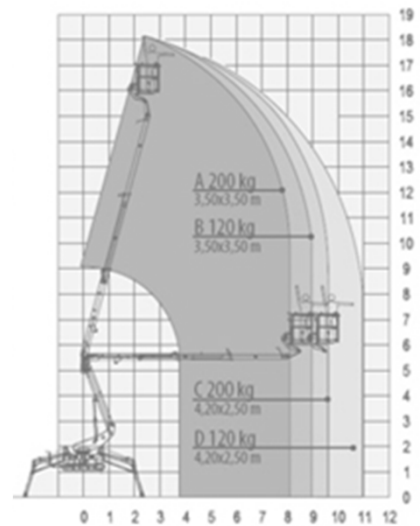

MTR210



- Working height up to 21,20 m - Maximum horizontal outreach 11,00 m
- Petrol Motor Honda 9,6 KW

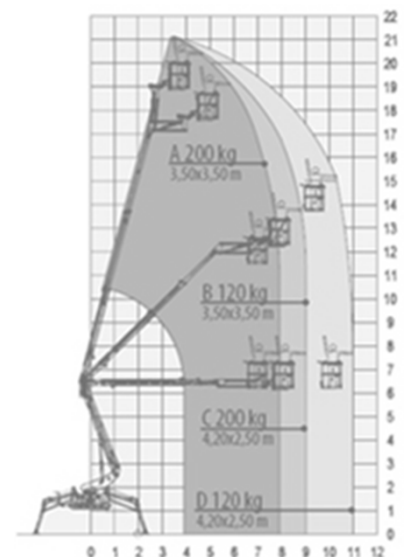

MTR260



- Working height up to 26,00 m - Maximum horizontal outreach 13,50 m
- Diesel Motor Hatz 25,7 KW

MTR300



- Working height up to 17,60 m - Maximum horizontal outreach 8,50 m
- Diesel Motor Hatz 25,7 KW

MTR CHARACTERISTICS

	MTR130	MTR150	MTR 160	MTR 180	MTR 190	MTR 210	MTR 260	MTR 300
Max. working height (m):	12.20	15.2	15.6	17.6	18.5	21.2	26.00	30
Max. working outreach with 200 kg (m):	6.50	8.50	7.5	8.5	11.00	11.00	13.50	14.50
Turntable rotation:	320°	320°	320°	320°	360°	360°	360°	360°
Aluminium basket L x W x H (mm):	1100 x 700x 1100	1100 x 700 x 1100	1100 x 700 x 1100	1100 x 700 x 1100	1400 x 700 x 1100	1400 x 700 x 1100	2000 x 800 x 1100	2000 x 800 x 1100
Basket max. load capacity (kg)	200	200	200	200	200	200	200	200
Basket rotation					90°+90°	90°+90°	90°+90°	90°+90°
Motor:	Petrol Honda 9.6kW	Petrol Honda 9.6kW	Petrol Honda 9.6kW	Petrol Honda 9.6kW	Petrol Honda 9.6kW	Petrol Honda 9.6kW	Diesel Hatz 25.7 kW	Diesel Hatz 25.7 kW
Gross weight (kg):	1600	2100	1950	2200	2800	3000	4800	6000
Outrigger footprint:	2600x2600	3400x3400	2800x2800	3100x3100	3500x3500 4200x2500	3500x3500 4200x2500	3900x3800 4400x3200 3200 x 4400	3900x3800 4400x3200 3200 x 4400
Transport dimensions L x W x H (mm):	4050 x 890 x 1980	5350 x 890 x 1990	4700 x 890 x 1950	5280 x 890 x 1950	4900 x 890 x 1980	5850 x 890 x 1930	6600 x 1400 x 2000	6700 x 1400 x 2000

	MTR 130	MTR 150	MTR 160	MTR 180	MTR190	MTR210	MTR260	MTR300
Hydraulic and proportional controls	✓	✓	✓	✓	✓			
Electro-hydraulic control Danfoss						✓	✓	✓
Radio Control							✓	✓
Cable control					✓	✓		
Acoustic signal during translation	✓	✓	✓	✓	✓	✓	✓	✓
Motor start/stop control from basket	✓	✓	✓	✓	✓	✓	✓	✓
Hand pump for emergency descent	✓	✓	✓	✓	✓	✓	✓	✓
Locks for safety belts on the basket	✓	✓	✓	✓	✓	✓	✓	✓
Outreach limiting device			✓	✓	✓	✓	✓	✓
Rubber crawler-tracks	✓	✓	✓	✓	✓	✓	✓	✓
Electric motor 220 V	✓	✓	✓	✓	✓	✓	✓	✓
Hour counter	✓	✓	✓	✓	✓	✓	✓	✓
Air/water plug	✓	✓	✓	✓	✓	✓	✓	✓
Electrical plug 220 V	✓	✓	✓	✓	✓	✓	✓	✓
Standard painting	✓	✓	✓	✓	✓	✓	✓	✓
CE Certificate	✓	✓	✓	✓	✓	✓	✓	✓
Use and maintenance handbook	✓	✓	✓	✓	✓	✓	✓	✓

OPTIONAL ACCESORIES

	MTR130	MTR150	MTR160	MTR180	MTR190	MTR210	MTR260	MTR300
Diesel engine (Hatz)	✓	✓	✓	✓	✓	✓		
Emergency pump 12/24V	✓	✓	✓	✓	✓	✓	✓	✓
Basket rotation 60°+60°	✓	✓	✓	✓				
Cable control	✓	✓	✓	✓				
Cable control + Stabilizers self-leveling	✓	✓	✓	✓				
Stabilizers self-leveling					✓	✓	✓	✓
Radiocontrol	✓	✓	✓	✓	✓	✓		
Extending tracks	✓	✓	✓	✓				
Non-marking tracks	✓	✓	✓	✓	✓	✓	✓	✓
Fiberglass basket	✓	✓	✓	✓	✓	✓		
Basket insulation 1.000V	✓	✓	✓	✓	✓	✓		
Working lamp on the basket	✓	✓	✓	✓	✓	✓	✓	✓
Inclinometer with acoustic alarm	✓	✓	✓	✓	✓	✓	✓	✓
4 pads for stabilizers	✓	✓	✓	✓	✓	✓	✓	✓
Battery version	✓	✓	✓	✓	✓	✓		
Electric motor 380V							✓	✓
Hydraulic generator 4,5kw							✓	✓
Hybrid version (Diesel + battery)							✓	✓



MOTTO
ELEVATION

Motto Elevation S.L.

T. +34 943 100 123

S motto.elevation

Pol. Bulandegi, 6

20150 Aduna (Gipuzkoa) Spain

www.mottoelevation.com

motto@mottoelevation.com